




Nasal Mask (N5A+)

Liberate more than the vision

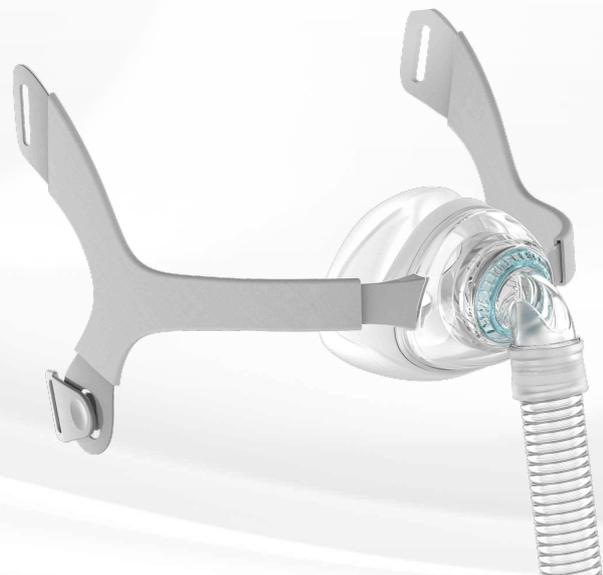

Key Features



Loop-distributed dispersion vent holes

They help a lot to optimize the noise control and minimize the disturbance to your bed partner.



Groove-fit cushion

The auto adjustment on the nose bridge can be achieved easily by the groove-fit cushion.



Unblocked vision

Forehead-brace-free design makes the patient's vision unblocked.



Easy clips

Easy to lock or loose

Technical Specifications

<p>Pressure-Flow Curve</p>	<table border="1" data-bbox="643 1272 1305 1352"> <tr> <td>Pressure (cmH₂O)</td> <td>4</td> <td>9</td> <td>15</td> <td>20</td> <td>25</td> </tr> <tr> <td>Flow Rate (L/min)</td> <td>19</td> <td>30</td> <td>39</td> <td>46</td> <td>52</td> </tr> </table>	Pressure (cmH ₂ O)	4	9	15	20	25	Flow Rate (L/min)	19	30	39	46	52
Pressure (cmH ₂ O)	4	9	15	20	25								
Flow Rate (L/min)	19	30	39	46	52								
<p>Dead Space Information</p>	<p>Dead space is the empty volume of the mask up to the swivel. The dead space of the mask varies according to cushion sizes but is less than 125 mL.</p>												
<p>Therapy Pressure</p>	<p>4 to 25 cmH₂O.</p>												
<p>Resistance</p>	<p>Drop in Pressure measured (average for 4 sizes) at 50 L/min: 0.8 cmH₂O at 100 L/min: 2.8 cmH₂O</p>												
<p>Sound</p>	<p>DECLARED DUAL-NUMBER NOISE VALUES in accordance with ISO 4871. The A-weighted sound power level of the mask is 28 dBA, with uncertainty 3 dBA. The A-weighted sound pressure level of the mask at a distance of 1 m is 20 dBA, with uncertainty 3 dBA.</p>												
<p>Environmental Conditions</p>	<p>Operating temperature: +5°C to +40°C (41°F to 104°F) Operating humidity: 0% ~ 93% relative humidity non-condensing Storage and transport: -20°C to +55°C (-4°F to 131°F) Storage and transport humidity: 0% ~ 93% relative humidity non-condensing</p>												